




Axil PDU

Power Distribution Units



Lockable C13 Sockets

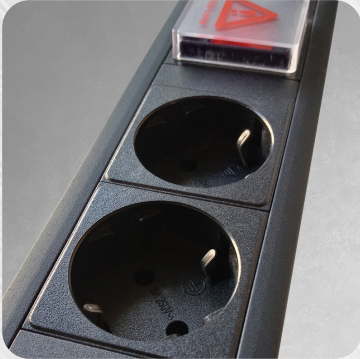

Schuko 2-Pin Sockets




RSA 3-Pin Sockets
(Type M)



C19 Sockets



Smart Meter

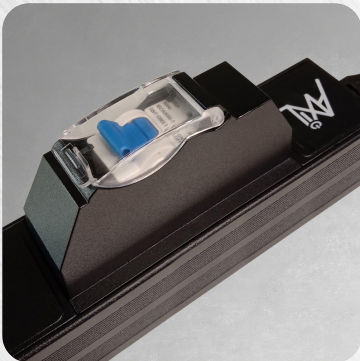

Circuit Breaker

PDUs allow reliable distribution of power from a single, dual or quad input power source to the cabinet. They are used to manage distribution of power to computers & networks in data centres and various other applications.



Axil 8-Way 2-Pin PDU


Axil 8-Way PDU

Axil Full Cabinet PDU

Smart Meter (optional), Circuit Breaker, 20 x Lockable C13 Sockets, 4 x C19 Sockets

Dimensions 1360 x 45 x 45 mm, Vertical Mount
Input Current 32 Amps


	PDU Model	Display	Ammeter	IP Function	Software
	Basic				
	Metered	LCD	Amps, Volts, kWh		
	Managed	LCD	Amps, Volts, kWh	IP-PDU	PDU VIEW
	Managed	LCD	Amps, Volts, kWh, Temp, Humidity	IP-PDU	PDU VIEW



Axil Half Cabinet PDU

12 x Lockable C13 Sockets, 2 x Locking C19 Sockets


Dimensions	700 x 45 x 45 mm	Input Cable	1.5 m (no plug)
Type	Vertical Mount	Output Sockets	12 x Lockable C13 sockets
Input Current	16 Amps		2 x Locking C19 sockets

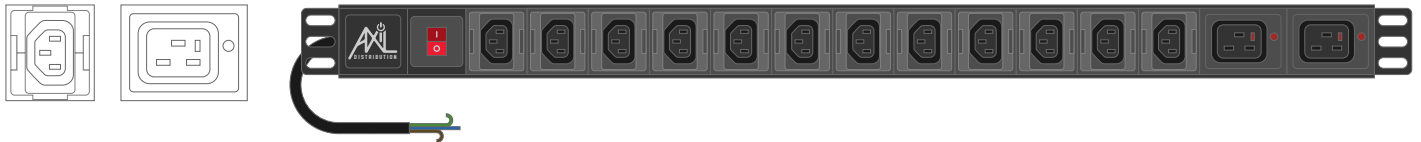

Axil 5-3-3 PDU

5 x RSA 3-Pin Sockets, 3 x Lockable C13 Sockets, 3 x Schuko Sockets


Dimensions	630 x 65 x 45 mm	Input Cable	1.5 m (no plug)
Type	Vertical Mount	Output Sockets	5 x RSA 3-Pin (Type M)
Input Current	16 Amps		3 x Lockable C13 sockets
			3 x Schuko 2-Pin sockets

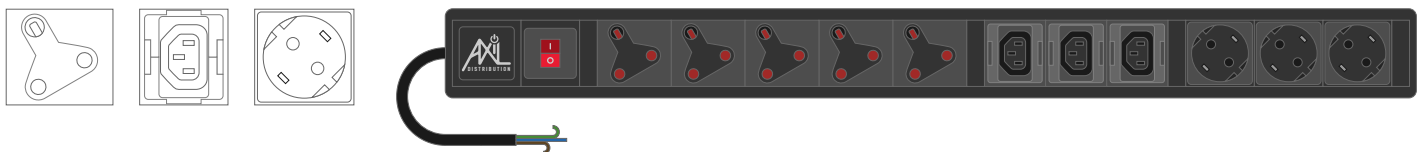

Axil 10-Way 3-Pin PDU

10 x RSA 3-Pin Sockets


Dimensions	620 x 65 x 45 mm	Input Cable	1.5 m (no plug)
Type	Vertical Mount	Output Sockets	10 x RSA 3-Pin (Type M)
Input Current	16 Amps		

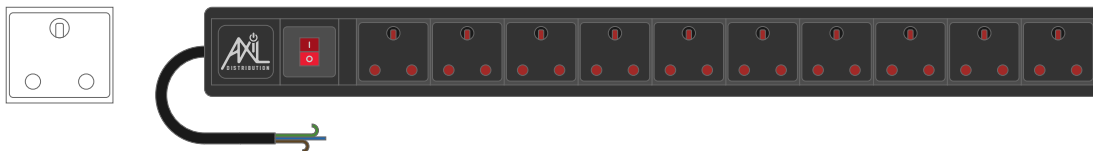

Axil 6-Way PDU

6 x RSA 3-Pin Sockets



Dimensions	440 x 65 x 45 mm	Input Cable	1.5 m (no plug)
Type	Vertical Mount	Output Sockets	6 x RSA 3-Pin (Type M)
Input Current	16 Amps		

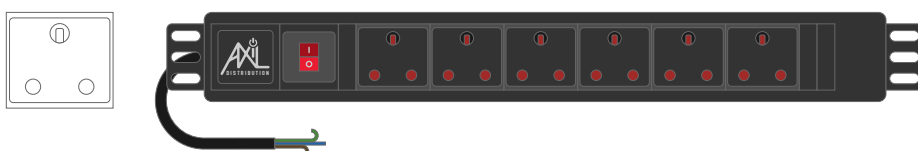

Axil 10-Way PDU

10 x C13 Sockets


Dimensions	520 x 45 x 45 mm	Input Cable	No cable / No plug
Type	Vertical Mount	Output Sockets	10 x Locking C13 sockets
Input Current	16 Amps		



Axil 9-Way PDU

9 x C13 Sockets

Dimensions	440 x 45 x 45 mm	Input Cable	1m cable with C14 plug
Type	Rack Mount	Output Sockets	9 x C13 sockets
Input Current	10 Amps		





Axil 8-Way PDU

8 x Locking C13 Sockets

Dimensions	440 x 45 x 45 mm	Input Cable	1m cable with C14 plug*
Type	Rack Mount	Output Sockets	8 x Locking C13 sockets
Input Current	10 Amps		



*Available without cable or plug

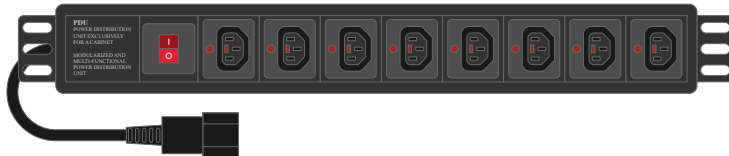

Axil Desktop PDU

2 x RSA 3-Pin Sockets, 2 x Schuko 2-Pin Sockets

Dimensions	255 x 65 x 45 mm	Input Cable	No cable / No plug
Type		Output Sockets	2 x Schuko 2-Pin sockets 2 x RSA 3-Pin (Type M)
Input Current	16 Amps		




Axil PDU | Power Distribution Units

Axil 8-Way 2-Pin PDU

8 x Schuko 2-Pin Sockets

Dimensions 440 x 45 x 45 mm
Type Rack Mount
Input Current 10 Amps

Input Cable No cable / No plug
Output Sockets 8 x Schuko 2-Pin sockets




PDU VIEW Monitoring Software

Monitor the power distribution units in your company with the Axil PDU VIEW Software. This will allow you to set minimum & maximum thresholds for:

Temperature, Humidity, Volts, Amps, Watts and Kilo Watts

Any currents outside these limits will trigger an alert and send a notification to the nominated SMS number or email address. The Axil PDU VIEW Software is available in 3 different versions, depending on the amount of PDU's you need to monitor - 20, 40 or 50 units.

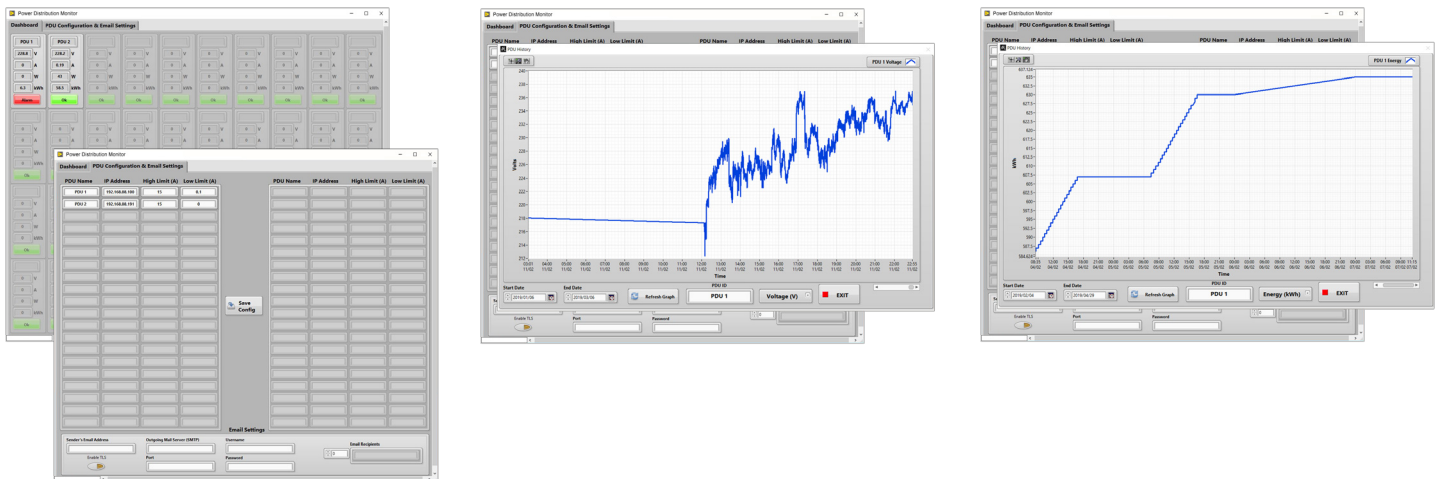

TALK TO US

☎ 0861 000 133

☎ 082 359 7060

☎ 086 540 6273

✉ info@axil.co.za

🌐 www.axil.co.za

📍 KwaZulu-Natal - Durban
Gauteng - Midrand
Cape Town - Montague Gardens

